


## CT1001 Touchscreen Thermostat

### Features:

- Easy to read backlit Touchscreen
- Partial or Full Lock Screen
- Maximum/Minimum Temperature Range setting
- 7-Day Programming
- Automatic changeover between Heat and Cool
- Menu Driven programming
- Service reminders (Filters, etc)
- Battery backup - Operates during power failures
- Works with most systems: single/dual stage heat pumps, furnaces, boilers
- Energy Star compliant
- Tamper Warning Label System
- 1 yr Money Back Guarantee

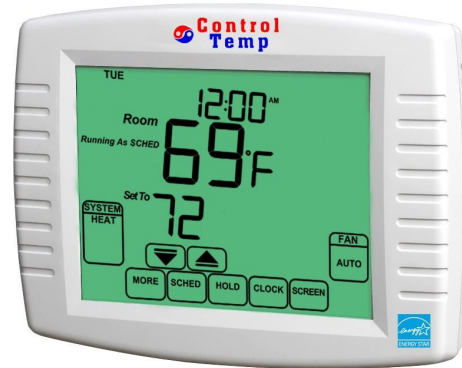

### Specifications

Setpoint Temperature Range:	Operating Humidity Range
40° F to 99° (Customizable)	90% non-condensing maximum
Rated Differential:	Shipping Temperature Range:
Heat 0.6° F; Cool 1.2°	-4° F to 150° F
Operating Ambient Temperature	
32° F to 105° F	

### Electrical Specifications

Power Supply	2 AA batteries and 24Vac 50/60Hz
Current Load	1.0 Amp (per terminal), 1.5Amp (All Connected)
Sensing Element	NTC
Operating Temperature	32-113° FC
Storage Temperature	-4-130°F
Operating Humidity	5-90%
Dimensions	6x4.5x1.2in (HxWxD)